

型号 Model
STD-1701-6/1. STD-1701-3/1

运用范围 APPLICATION

・用于浴缸、沐足盆等卫浴产品作水系统
・其它环境下排放无颗粒液体。


・ It is used for the drainage system of bath crock and bath water bath
・ Used in water sinks, dishwashers, washing machines, etc
・ In other environments, there is no granular liquid.

使用及存储环境 STORAGE AND APPLICATION

・使用电压：220V
・流量：排水流量 500ml/s
・开孔尺寸 :Φ50
・海拔高度＜ 1000m
・环境温度＜ 50° C
・输送液体的温度不超过 5-70° C
・存储环境：室温 ~ 85° C，相对湿度 5 ~ 95%

・ Use Vbltage:220v
・ Flow:Drainage flow500ml/s
・ HOLE Size: <Φ 50
・Altitude: < 1000m
・ Temperature: < 50° C
・ Temperature of water in transportation: 5-70° C
・ Storage: Temperature: Room temperature ~ 85° C , Humidity:5 ~ 95%



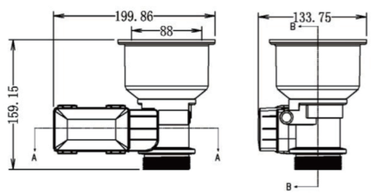

型号 Model
STD-1703/6.STD-1703-3

运用范围 APPLICATION


・用于水槽、洗碗机、洗菜机等厨卫产品上做下水器
・其它环境下排放无颗粒液体


・ It is used for the drainage system of bath crock and bath water bath
・ Used in water sinks, dishwashers, washing machines, etc
・ In other environments, there is no granular liquid.

使用及存储环境 STORAGE AND APPLICATION

・使用电压：220V
・流量：排水流量 500ml/s
・开孔尺寸：＜ Φ88
・海拔高度＜ 1000m
・环境温度＜ 50° C
・输送液体的温度不超过 5-70° C
・存储环境 : 室温 ~ 85° C，相对湿度 5 ~ 95%

・ Use Vbltage:220v
・ Flow:Drainage flow500ml/s
・ HOLE Size: <Φ 88
・ Altitude: < 1000m
・ Temperature: < 50° C
・ Temperature of water in transportation: 5-70° C
・ Storage: Temperature: Room temperature ~ 85° C , Humidity:5 ~ 95%





型号 Model
STD-2305-6

运用范围 APPLICATION

・用于浴缸、沐足盆等卫浴产品作水系统
・其它环境下排放无颗粒液体。


・ It is used for the drainage system of bath crock and bath water bath
・ Used in water sinks, dishwashers, washing machines, etc
・ In other environments, there is no granular liquid.

使用及存储环境 STORAGE AND APPLICATION

・使用电压：DC12V
・流量：排水流量 500ml/s
・开孔尺寸 :Φ50
・海拔高度＜ 1000m
・环境温度＜ 50° C
・输送液体的温度不超过 5-70° C
・存储环境：室温 ~ 85° C，相对湿度 5 ~ 95%

・ Use Vbltage:220v
・ Flow:Drainage flow500ml/s
・ HOLE Size: <Φ50
・Altitude: < 1000m
・ Temperature: < 50° C
・ Temperature of water in transportation: 5-70° C
・ Storage: Temperature: Room temperature ~ 85° C , Humidity:5 ~ 95%





型号 Model
STD-2306-6

运用范围 APPLICATION

・用于水槽、洗碗机、洗菜机等厨卫产品上做下水器
・其它环境下排放无颗粒液体

・ It is used for the drainage system of bath crock and bath water bath
・ Used in water sinks, dishwashers, washing machines, etc
・ In other environments, there is no granular liquid.

使用及存储环境 STORAGE AND APPLICATION

・使用电压：DC12V
・流量：排水流量 500ml/s
・开孔尺寸：＜ Φ88
・海拔高度＜ 1000m
・环境温度＜ 50° C
・输送液体的温度不超过 5-70° C
・存储环境 : 室温 ~ 85° C，相对湿度 5 ~ 95%

・ Use Vbltage:220v
・ Flow:Drainage flow500ml/s
・ HOLE Size: <Φ 88
・ Altitude: < 1000m
・ Temperature: < 50° C
・ Temperature of water in transportation: 5-70° C
・ Storage: Temperature: Room temperature ~ 85° C , Humidity:5 ~ 95%